

# Battery Buddie

## 12VLA



## Instructions:

Refer to the diagram 1 below while following instructions. Read all instructions before attempting installation of Battery Buddie.

1- Clean a surface on the battery to attach Battery Buddie. Peel off the protective paper over the adhesive surface and place on cleaned battery surface. Press gently into place to insure proper adhesion. Once attached do not try to remove. Damage may result.

**Note:**

Surface must be cleaned of all moisture, chemicals and oil residues to adhere properly. Excessive pressure used to attach adhesive may damage Battery Buddie.

2-Connect the **Black** wire to the Negative post of the battery.

3-Connect the **Red** wire to the Positive post of the battery.

**Note:**

Additional insulation may have to be removed from the Red and Black wires to allow for proper contact with the battery terminals.

**Warning:**

Reversing the wire connections or improperly connecting Battery Buddie to the battery, will result in damage to Battery Buddie Not covered by warranty.

4- Push Test Button for color indication.

**Note:**

Proper colors for a good battery should be Green, Yellow, Yellow, Red. See Following Chart.

Green, Yellow1, Yellow2, Red	– Good and Ready For Use
Yellow1, Yellow2, Red	– Battery Low Should Charge
Yellow2, Red	– Battery Very Low Charge Now
Red	– Battery Too Low to Use Charge Before Use
No Color	– Battery Dead or Very Weak, Replace

5- If your Battery Buddie has a third **White** wire, refer to diagram 2 for connection. This is an indicator option. It indicates that the charge device attached to the battery is functional. Attach as indicated in diagram 2.

**Warning:**

This procedure should only be performed by a qualified/licensed Technician. Improper connections can result in damage to battery(s), Battery Buddie and the equipment associated with the battery(s). Consult original equipment manufacture prior to installing Battery Buddie or modifying that equipment. See Warranty.

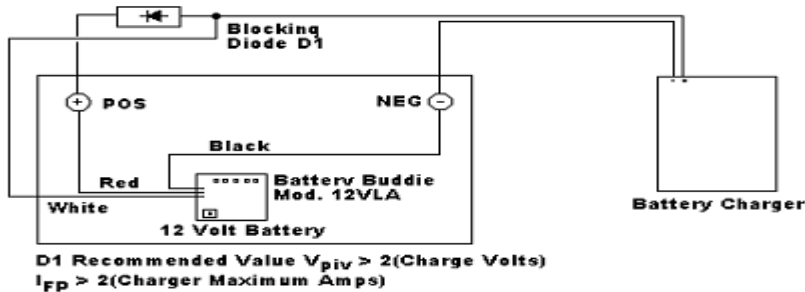


Diagram 2

## Thank You Purchasing a Battery Buddie, The Employees of Gibson Engineering & Computers, Inc.

Battery Buddie has a 1 year limited warranty against manufacturing defects. Return to the place of purchase or to Gibson Engineering & Computers, Inc. for replacement. Warranty does not cover damage due to improper connection, installation or de-installation either due to physical or electrical damage to the device or any of its components. Gibson Engineering & Computers, Inc. assumes no liability or claims for any damage(s) to battery(s) and/or other equipment Battery Buddie is attached to directly or remotely or in proximity of. Always Consult your original equipment manufactures requirements and specifications before connecting Battery Buddie.

Gibson Engineering & Computers, Inc.  
 3575 S. West Temple, #6  
 Salt Lake City, Utah 84115  
 Phone: 801.261.8181  
 Fax: 801.261.1095  
 Web: [www.GibsonEng.com](http://www.GibsonEng.com)